


Speedroller

Best basis for intensive use

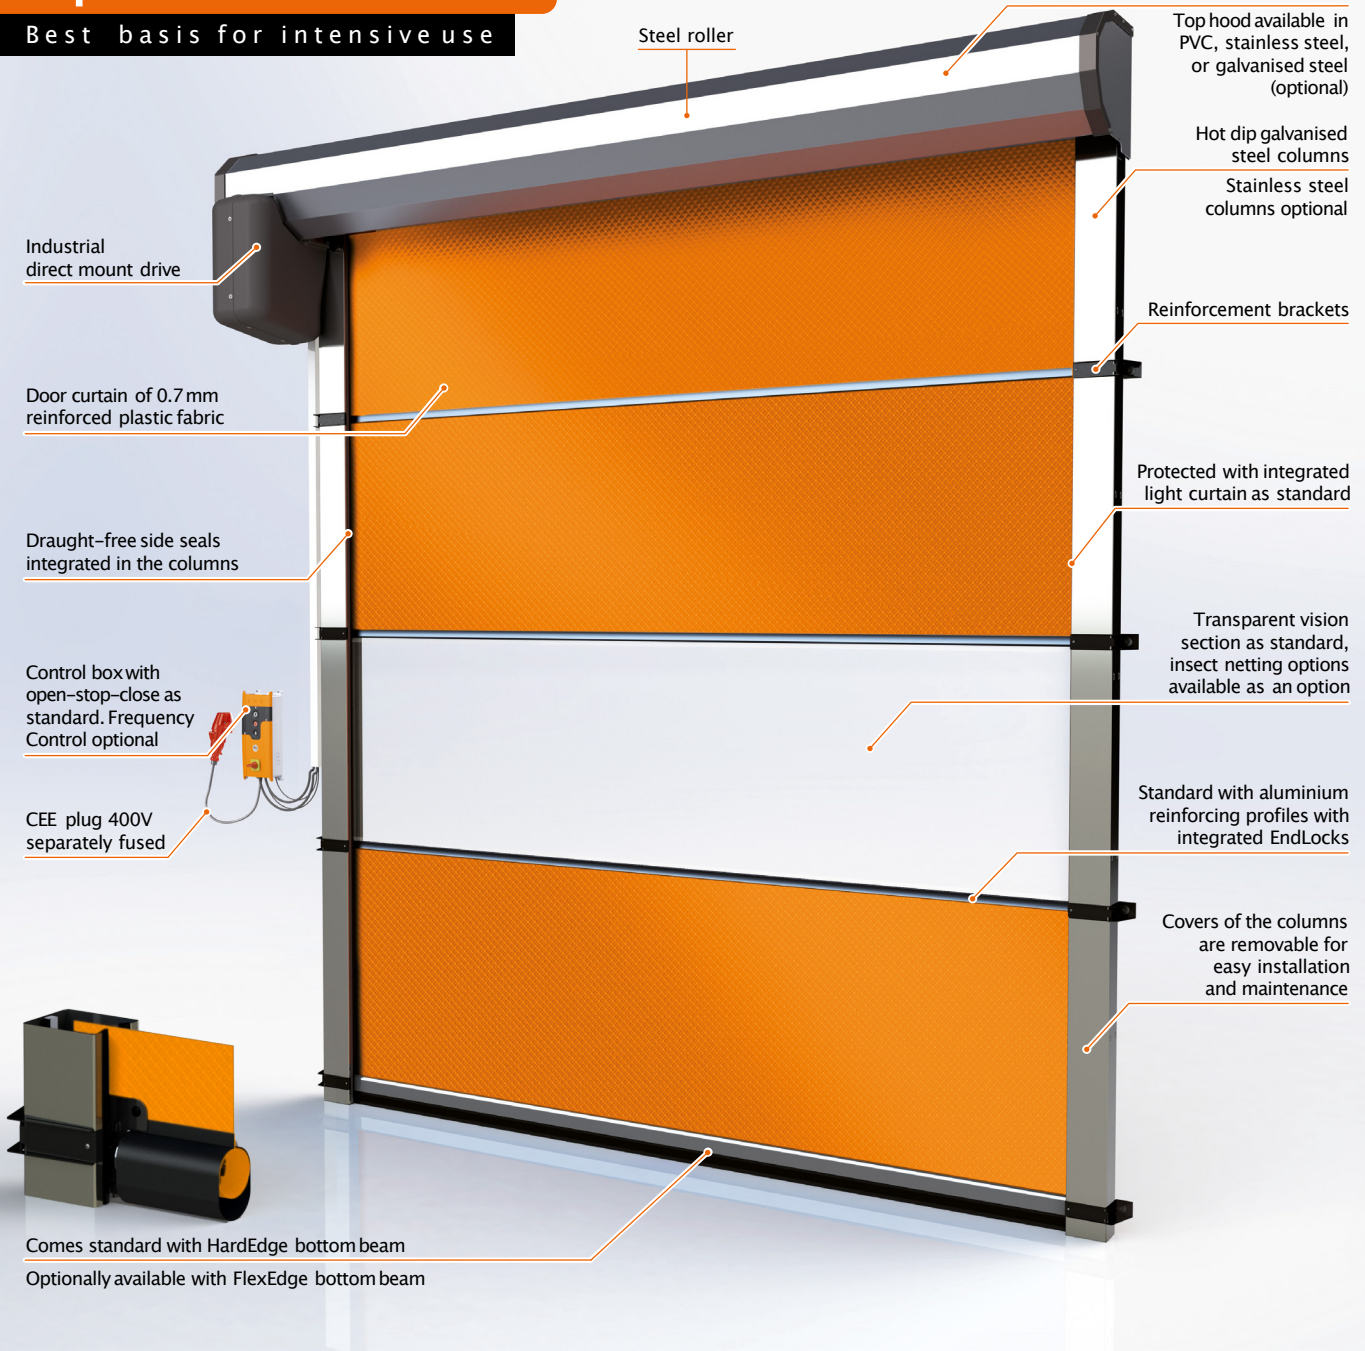

Steel roller

Top hood available in PVC, stainless steel, or galvanised steel (optional)

Hot dip galvanised steel columns
Stainless steel columns optional

Industrial direct mount drive

Reinforcement brackets

Door curtain of 0.7 mm reinforced plastic fabric

Protected with integrated light curtain as standard

Draught-free side seals integrated in the columns

Transparent vision section as standard, insect netting options available as an option

Control box with open-stop-close as standard. Frequency Control optional

Standard with aluminium reinforcing profiles with integrated EndLocks

CEE plug 400V separately fused

Covers of the columns are removable for easy installation and maintenance

Comes standard with HardEdge bottom beam
Optionally available with FlexEdge bottom beam

STRONG

A reliable basis for intensive use

Properties

- max. surface area (WxH) =25 m², max. width (W) =5,000mm, max. height (H) =5,000mm
- max. wind load resistance class 2 according to EN 12424, or up to 7 Beaufort minimal (50 – 61 km/h)
- opening speed with Frequency Control max. 1.8 m/s*, closing speed approx. 0.5 m/s
- 0.7 mm thick door curtain (1.2 mm option) in blue, black, white, grey, graphite grey, red, orange or yellow
- various window types available as an option
- designed as an inside door for larger doorways with average wind load
- EN13241 compliant

Max. wind load resistance*

Up to 3,000mm	Class 2
Up to 4,000mm	Class 1
Up to 5,000mm	Class 0



STRONG

The Strong is the standard rapid roll door for intensively used openings. Proven technology guarantees years of trouble-free operation. All aspects of the door are robustly designed and well-engineered for every day energy saving, draught exclusion and climate control.

Dimensions	
max. width	5,000 mm
max. height	5,000 mm
max. surface area	25 m ²
required lateral space at the guides	170 mm
required lateral space at slip on drive	300 / 425 mm*
required lateral space at drive for fitting	400 / 475 mm*
lateral space at side guide profiles	145 / 200 mm*
space above	410 / 460 mm*
Max wind load resistance*	
Up to 3,000 mm	Cl. 2
Up to 4,000 mm	Cl. 1
Up to 5,000 mm	Cl. 0

Components and construction

The SpeedRoller Strong is a door without balance springs, consisting of an electrically driven door curtain rolled up on a roller above the opening. The door curtain is made of horizontal sections of extremely durable polyester-reinforced PVC. The sections are fitted with aluminium reinforcement profiles with integrated EndLocks, and can be equipped with various types of vision- or insect netting sections between approx. 1,000 and 2,000 mm height. The bottom of the door curtain has a solid HardEdge bottom beam, a flexible FlexEdge bottom beam is available as an option. U-shaped columns with sideseals ensure lateral guidance of the door curtain. The lateral guides are one unit combined with the bearing plates for secure fastening to the roller and drive.

Materials

The door columns are made of two hot dip galvanised steel profiles. The front covers are removable for fast and simple installation and maintenance. The side seals are specifically tailored to your use. The horizontal roller is steel. The HardEdge bottom beam is aluminium, the optional FlexEdge bottom beam is sturdy but flexible and has a soft outer shell. The door curtain is a 0.7 mm thick PVC with a polyester reinforcement inlay. 1.2 mm fabric optionally available¹.

Colour

The door curtain is available in the colours blue, black, white, grey, graphite grey, red, orange or yellow and provided with a vision section.

Drive

The drive consists of an electric motor with reduction unit. The roller is directly driven. Drive side available left or right (standard).

Technical details electric motor

- mains voltage without frequency control 3N~400V/50Hz/16A
- mains voltage with frequency control LNPE~230V/50Hz/16AT
- degree of protection IP65
- consumed power max. 2 kW

Protection

- the door can be manually opened in the case of a power loss
- electric motor with reduction unit and built-in roll-off safety
- light curtain up to 2,500 mm high

Performance	
control box without frequency control (standard):	
max. opening speed	0.7 m/s
max. closing speed	0.5 m/s
control box with frequency control (optional):	
max. opening speed	1.8 m/s*
max. closing speed	0.5 m/s

Structural provisions and connection

- a flat mounting frame and the necessary mounting space must be available
- exact installation dimensions in the Technical Datasheet
- within a radius of 500 mm of where the control unit without frequency control will be positioned there must be a wall socket: - CEE-form red, 3N~400V/50Hz/16A
- within a radius of 500 mm of where the control unit with frequency control will be positioned there must be a wall socket: - CEE-form blue, 1 x 230V fused, slow operation 16A fitted with a circuit-breaker of at least 300 mA
- the control box usually is fitted on the drive side, at a height of approx. 1,500 mm from the floor
- with standard CEE-plug, the control box is IP54 compliant

Control and operation

The control unit has 3 buttons (open-stop-close) and a CEE plug, and regulates a multitude of functions such as:

- adjustable open time
- service and run mode
- 7-segment display for control of the various functions
- permanently open or permanently shut

Additional controls that can be connected to the control box are:

- push-button, pull switch, key-operated switch, photocell, radar, induction loop detection or radio control.
- Other forms of operation on request



Available controls:

TS971, TS981

Extras¹

Control and operation

- frequency control
- additional controls as described above
- control box directly wired (control box IP65)
- main switch directly wired on the control box (IP65)
- door interlock control in combination with another door
- connection of traffic lights (red/green or red and green)
- warning light (orange or red)

Construction

- 1.2 mm thick door leaf
- flexible 'FlexEdge' bottom beam
- windows sections made of mosquito netting
- stainless steel columns
- PVC, metal or stainless steel hood
- hood and PVC cover in customer-specified RAL colour

* Depending on the configuration ¹ subject to surcharge

Dock And Door Engineering Ltd

Unit D13,
M4 Interchange Business Park,
Maynooth Road,
Celbridge,
Co. Kildare
W23K85Y

W: www.dade.ie
E: Info@dade.ie
T: 01 2243581



**DOCK AND DOOR
ENGINEERING**
dade.ie